



A WORLD LEADER IN FUME  
EXTRACTION TECHNOLOGY

# PrintPRO 1500 iQ

Last Updated on 12.04.2021



The high end fume extraction system for wide format printers and the printing industry.

BOFA's PrintPRO 1500 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new PrintPRO 1500 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

More information about the [Intelligent Operating System \(iQ\)](#).

## Technology



**Intelligent Operating System (iQ)**



**DeepPleat DUO pre-filter**



**HEPA filter**



**Automatic flow control (AFC) technology**



**Reverse flow air (RFA) technology**



**Advanced carbon filter (ACF) technology**



**Patented technology**



**ProTECT service plan**



**SureCHECK quality standard**

## Key features of the PrintPRO 1500 iQ

**iQ Operating System**  
Standard

**Reverse flow air technology**  
Standard

**High airflow and pressure rates**  
Standard

**DeepPleat DUO pre-filter**  
Standard

Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/printpro-1500-iq/>



**Combined HEPA / gas filter incorporating ACF technology**  
Standard

**Automatic flow control system**  
Standard

**Independent filter condition monitoring, display and warnings**  
Standard

**'Run safe' operation**  
Standard

**VOC gas sensor (Volatile Organic Compound)**  
Optional

**Filter change / system fail signal**  
Optional

**Filters with long life and low replacement cost**  
Standard

**Real time airflow reading**  
Standard

**High contrast display**  
Standard

**Remote diagnostics via USB**  
Standard

**Remote stop / start interface**  
Optional

**Interfacing**  
Optional

## Technical Specification

1. IQ display

2. On / off switch

3. Power cable

4. Signal / interface cable

5. Castors

6. Door hinge

7. Hose inlet connection -  
125mm


8. Exhaust outlet

9. Motor cooling inlet



10. Door latch

11. Motor cooling outlet

12. Standby button

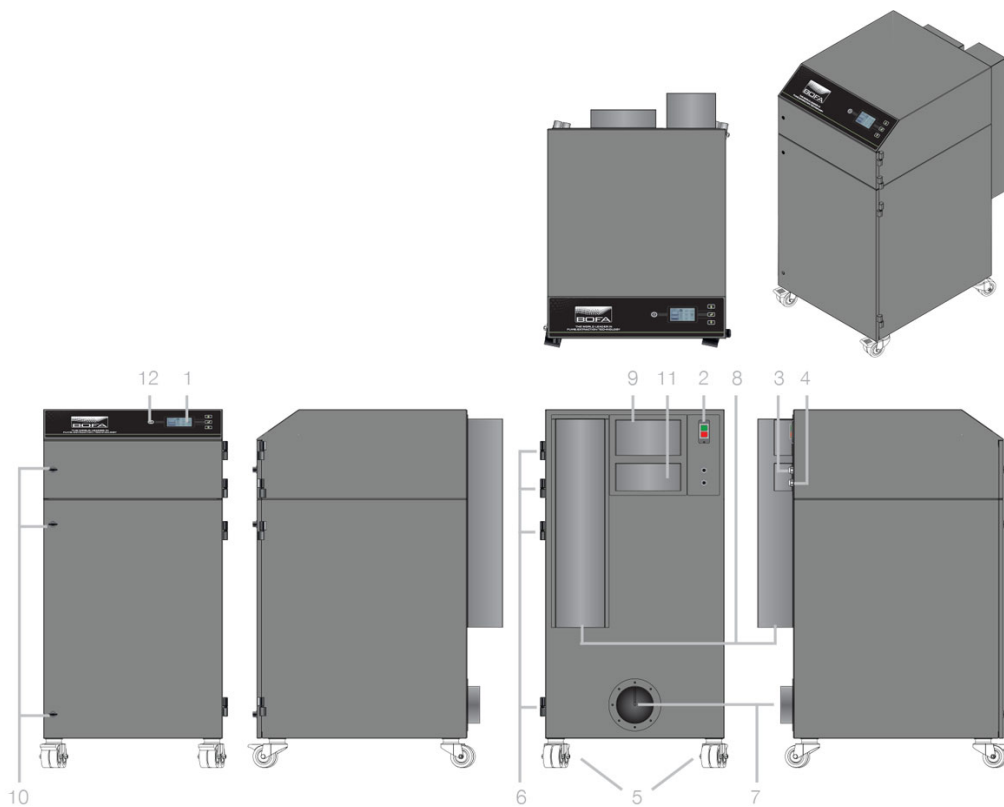

## Airflow through filters

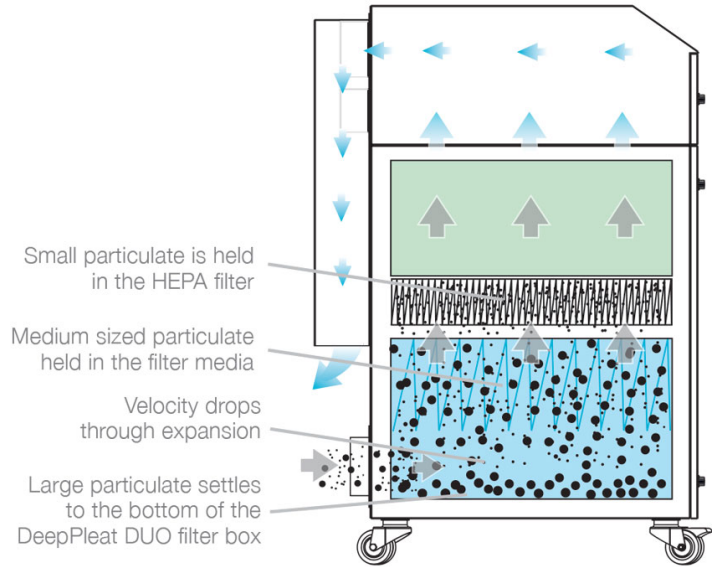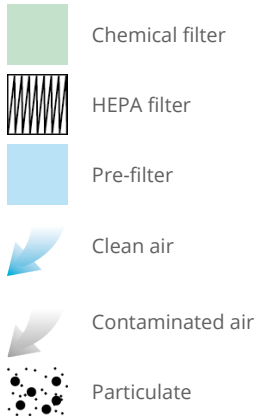

### Technical data

	EU
Dimensions (HxWxD)	1205 x 615 x 790mm (47.44 x 24.22 x 31.10")
Cabinet construction	Brushed stainless steel / powder coated mild steel
Airflow / pressure	1250m <sup>3</sup> /hr (735cfm) / 100mbar
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 24 amps / 3.3kw
Noise level	< 66dBA (at typical operating speed)
Weight	146kgs (322lbs)
Approvals	CE   cUL   UL *

### Deeppleat pre-filter specifications

Surface media area	30m <sup>2</sup> approx (322.8 ft <sup>2</sup> )
Filter media	Borosilicate
Filter media construction	Maxi pleat construction with glue bead spacers
Filter media construction	Zintec mild steel
Filter housing	95% @ 0.9 microns
Inlet size	125mm (0.4 ft)
Dropout chamber size	58 litres
Filter media pleat size	200mm (0.65 ft)

### Combined HEPA / gas filter specifications

Surface media area	7.5m <sup>2</sup> approx (80.7 ft <sup>2</sup> )
HEPA filter media	Borosilicate
HEPA media construction	Maxi pleat construction with glue bead spacers
Filter housing	Zintec mild steel
Treated activated carbon	34kgs (74.8 lbs)

## Combined HEPA / gas filter specifications

Filter efficiency	99.997% @ 0.3 microns
-------------------	-----------------------

## Unit part numbers

Model	Voltage	Part no.
PrintPRO 1500 iQ Powder coated	230V	L4472

## Options

Model	Voltage	24V stop / start	Filter change / system failure signal	VOC monitoring
PrintPRO 1500 iQ Powder coated	230V	A2001	A2002	A2003

## Replacement filter part numbers

Model	Part no.	Combined HEPA / gas filter
PrintPRO 1500 iQ	A1030222	A1030304

\* Tested to UL and cUL standards, but testing may be provided by alternate nationally recognised test laboratories. Certain product configurations may affect the UL certification. Please speak to your sales representative.

*Datasheet correct at time of publishing.*

*Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.*

*Think before you print! Please consider the environment before printing this document.*

